


Installing the Aeshna Tonearms.

1. For ZV8-X, ZV11-X and non Zavfino turntables (do not need for the Copperhead-X). Using the Template №1. https://www.gong-lux.ru/_files/ugd/db3b2d_1eb197629cda4415a467669916238060.pdf




Adjust the collar with the hole for the tonearm with the distance to the center of the disc according the template (the distance have be 215,4 mm). The diameter of the hole for Aeshna Tonearms – 30 mm.

The second step is performed after preliminary adjustment of the tonearm height (adjustment on the collar) and preliminary tracking force (adjustment by a counterweight that can be separated into two parts).

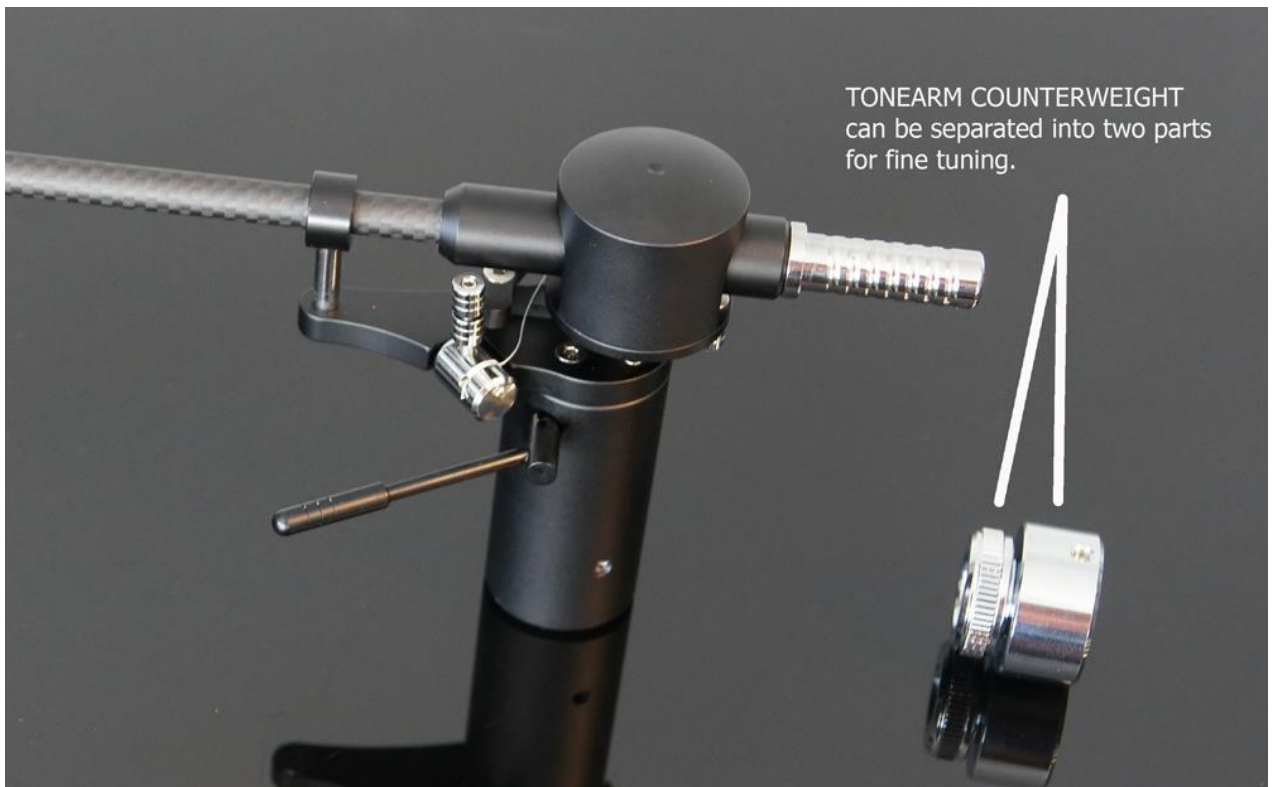

2. Using the Template №2 (Protractor) https://www.gong-lux.ru/_files/ugd/db3b2d_02d0325b524448d1a590dd69f1cbee10.pdf :

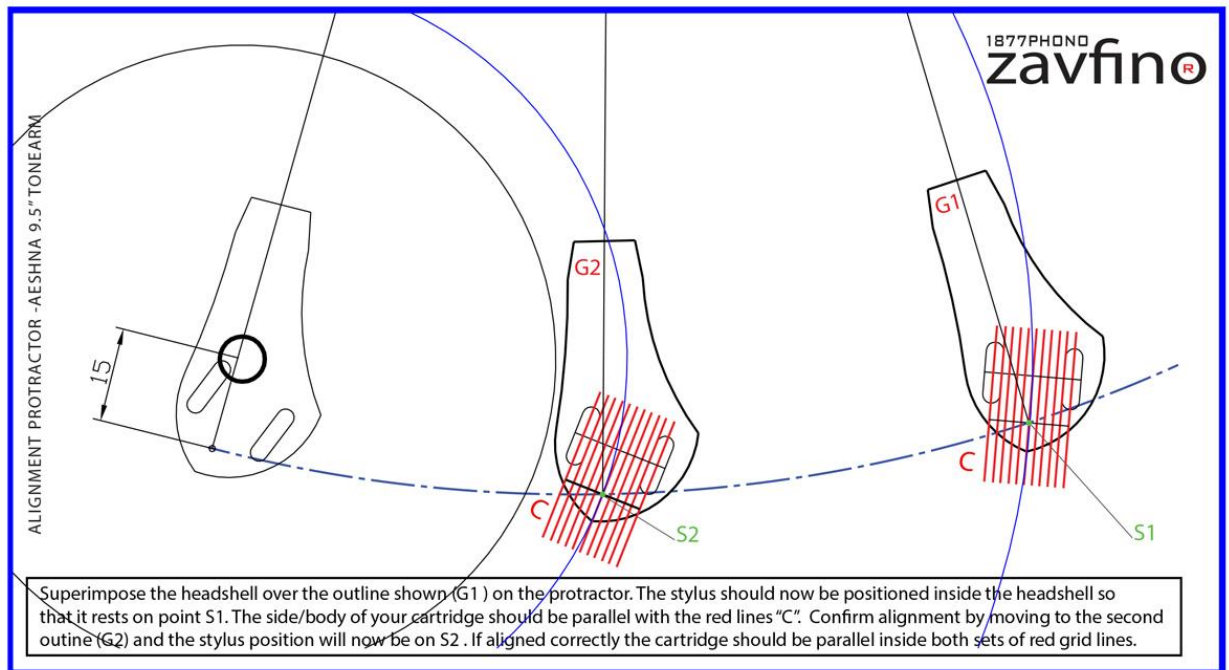

- 2.1 Check the shell position (left picture).
- 2.2 Install the phonocartridge (the right picture – G1). The phonocartridge has to be parallel the red lines, the needle has to be placed to point S1.
- 2.3 Check the shell and cartridge placement (the middle picture - G2).
- 2.4 Set up the correct tracking force depending on the phonocartridge rotating the metal tubes.



ANTI-SKATING adjustment